



TEREX®



**PICK & CARRY CRANE
AT 20-3**

DATASHEET - METRIC

AT 20-3



Features: AT 20-3

- ▶ 20 tonne at 1.4 m radius
- ▶ 1.60 tonne at 15.8 m radius
- ▶ 17 m maximum hook height
- ▶ Hook block (4 parts) capacity 16.8 tonne
- ▶ Single line 4.2 tonne

WA UNIVERSAL



Key

..... 3

Dimensions

Crane dimensions 4, 5
Range diagram..... 6
Area of operation 7

Load charts

Fallblock 8
Fallblock, manual 9

Technical description

Boom and Jib 10
Winch 10
Engine and transmission 10
Hydraulic system 11
Chassis 11
Tyres..... 11
Vehicle performance..... 12
Cab, controls, and operator aids..... 12

Crane Dimensions


[illegible]

DIMENSIONS

Crane Dimensions




AT 20-3

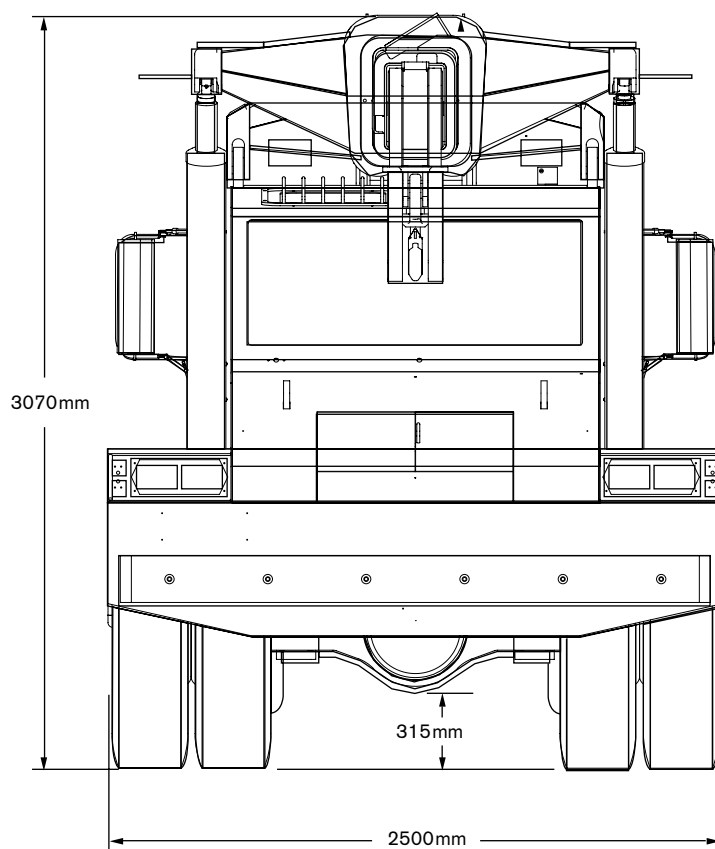


RADIUS LOAD CHART



AT 20-3




Pick & Carry 0.4m/s (1.44 km/h); On rubber 66.6%

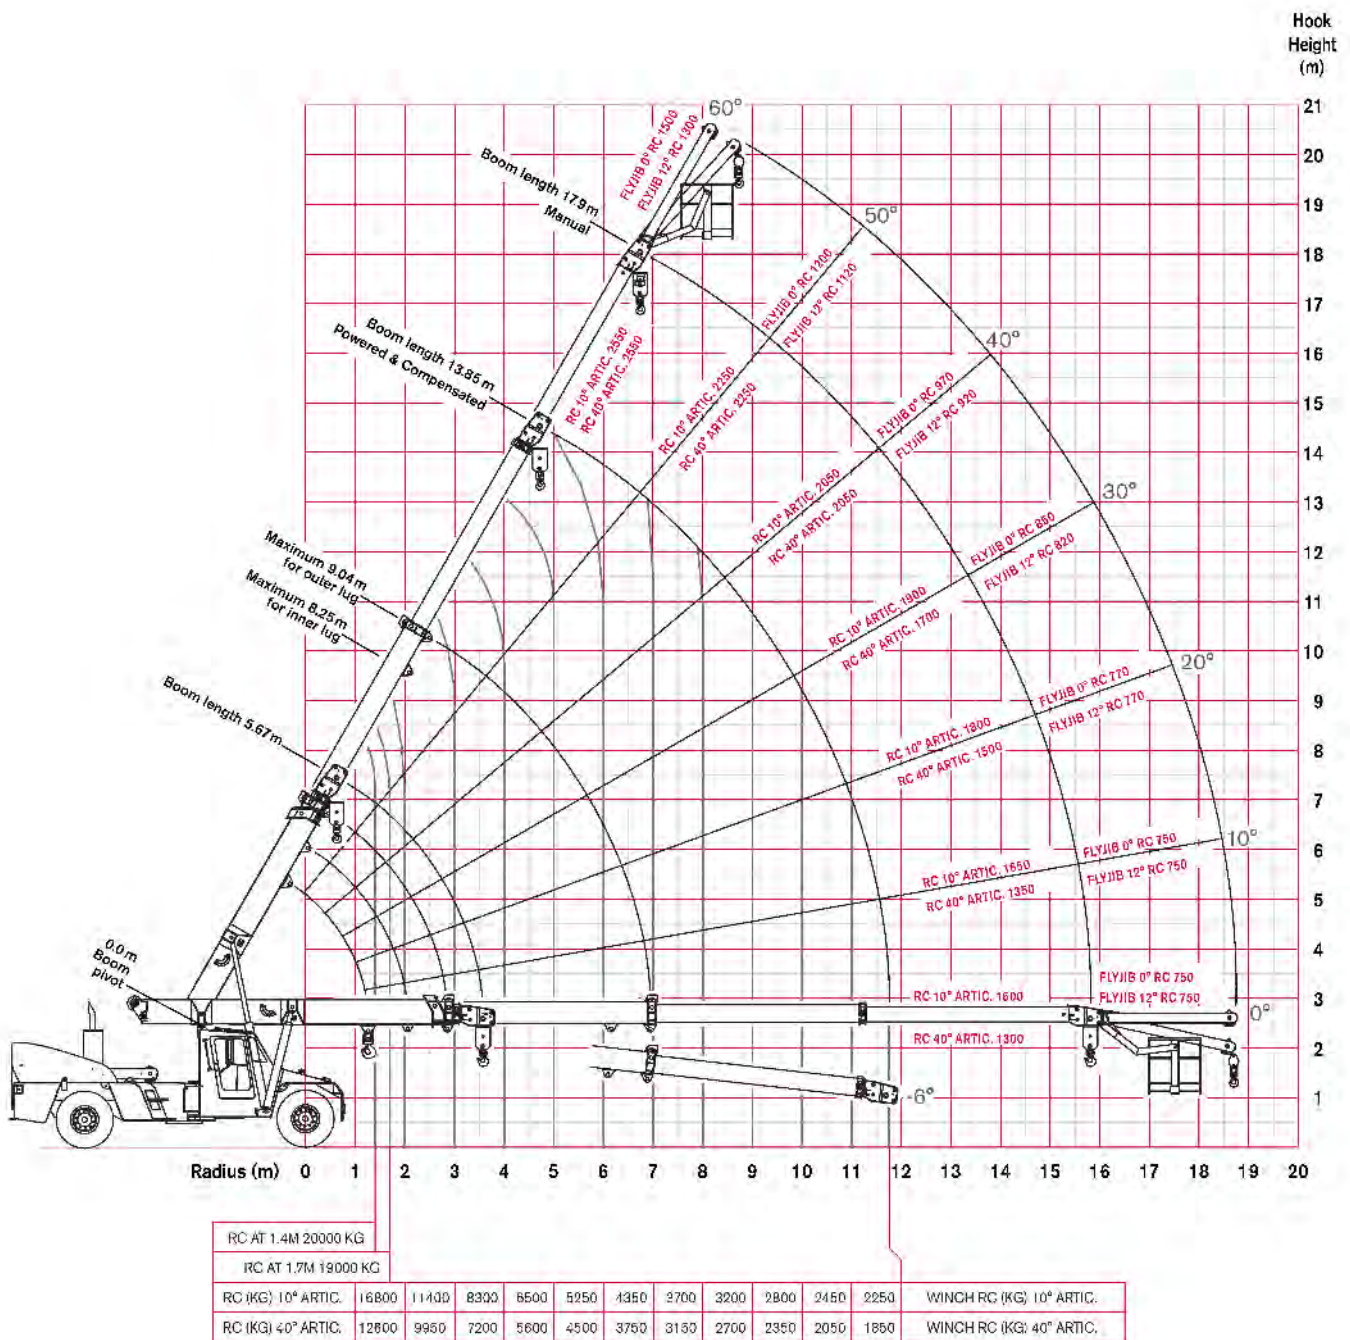

AREA OF OPERATION



AT 20-3

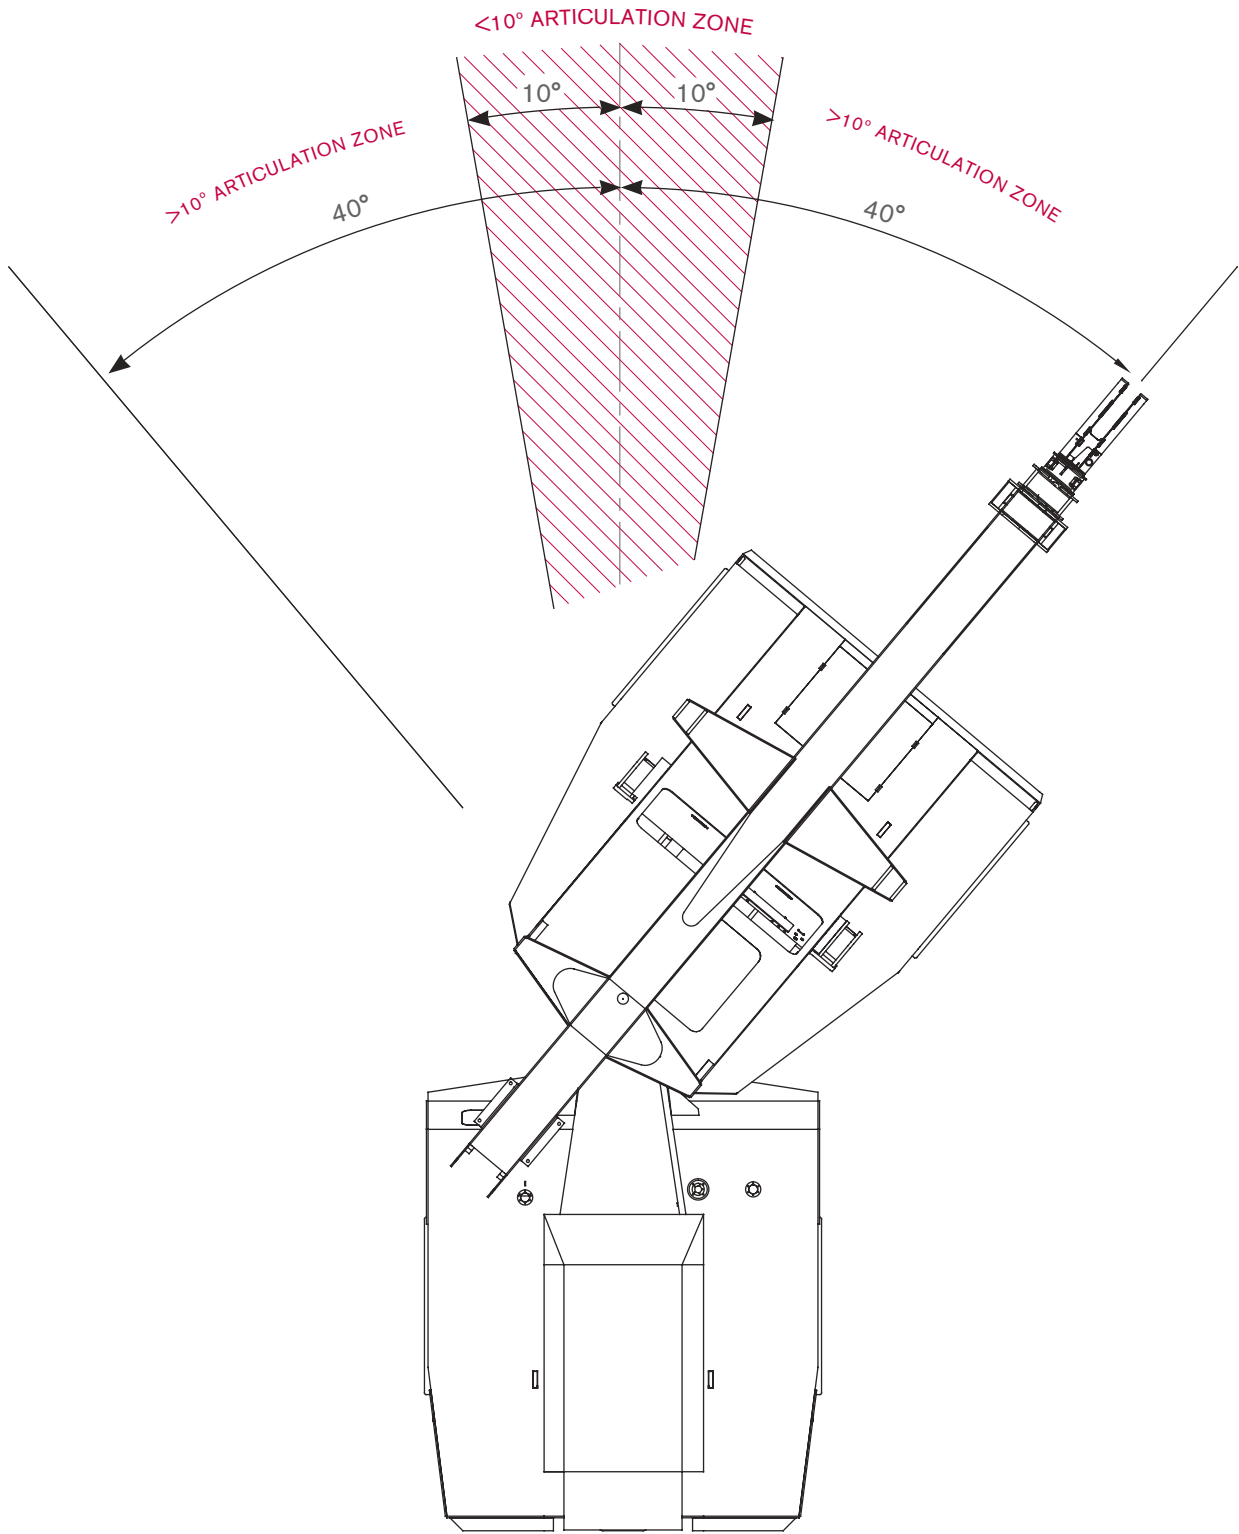


LOAD CHART

Fallblock



AT 20-3



Pick & Carry 0.4 m/s (1.44 km/h); On rubber 66.6%



5.67–13.85 m

AS 1418.5

	Boom Length (m)																			
	5.67	6.00	6.50	7.00	7.50	8.00	8.50	9.00	9.50	10.00	10.50	11.00	11.50	12.00	12.50	13.00	13.50	13.85		
m	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	m
1.6	16800	16250	15450	14900																1.6
	12600	12600	12600	12600																
	48°	51°	54°	57°																
2.0	16800	16800	16500	15700	15100	14700	14350													2.0
	12600	12600	12600	12600	12600	12600	12600													
	42°	46°	50°	53°	56°	58°	60°													
2.5	13900	13900	13900	13850	13850	13850	13850	13200	13000											2.5
	12150	12150	12100	12100	12100	12100	12100	12050	12050											
	34°	39°	44°	48°	51°	54°	56°	58°	60°											
3.0	11450	11450	11450	11400	11400	11400	11400	11400	11400	11150	10250									3.0
	9950	9950	9950	9950	9950	9950	9900	9900	9900	9900	9900									
	25°	31°	37°	42°	46°	49°	52°	55°	57°	59°	60°									
3.5	9650	9650	9650	9650	9650	9650	9650	9650	9650	9650	9500	8150	7500							3.5
	8400	8400	8400	8400	8400	8400	8400	8400	8350	8350	8350	8150	7500							
	8°	20°	29°	36°	41°	45°	48°	51°	53°	55°	57°	59°	60°							
4.0	9450	8550	8350	8350	8350	8350	8350	8350	8300	8300	8300	7600	7000	6700	6450					4.0
	8200	7450	7250	7250	7250	7250	7250	7250	7200	7200	7200	7200	7000	6700	6450					
	(3.57)	(3.90)	19°	28°	35°	39°	43°	47°	49°	52°	54°	56°	57°	59°	60°					
4.5			7500	7300	7300	7300	7300	7300	7300	7300	7300	7150	6550	6250	6050	5800	5650			4.5
			6500	6350	6350	6350	6350	6350	6300	6300	6300	6300	6300	6250	6050	5800	5650			
			(4.40)	19°	27°	34°	38°	42°	45°	48°	50°	52°	54°	56°	58°	59°	60°			
5.0				6650	6500	6500	6500	6500	6500	6500	6500	6500	6150	5900	5650	5450	5300	5150		5.0
				5750	5600	5600	5600	5600	5600	5600	5600	5600	5600	5600	5600	5450	5300	5150		
				(4.90)	18°	27°	33°	37°	41°	44°	47°	49°	51°	53°	55°	56°	58°	59°		
6.0					5950	5350	5250	5250	5250	5250	5250	5250	5250	5250	5050	4850	4700	4600		6.0
					5100	4600	4550	4550	4550	4500	4500	4500	4500	4500	4500	4500	4500	4500		
					(5.40)	(5.90)	17°	25°	31°	35°	39°	42°	45°	47°	49°	51°	53°	54°		
7.0							4850	4450	4400	4400	4400	4400	4400	4400	4350	4350	4350	4200	3950	7.0
							4200	3800	3750	3750	3750	3750	3750	3750	3750	3750	3750	3750		
							(6.40)	(6.90)	16°	24°	29°	34°	37°	40°	43°	45°	47°	48°		
8.0										4100	3750	3700	3700	3700	3700	3700	3700	3600		8.0
										3500	3200	3150	3150	3150	3150	3150	3150	3150		
										(7.40)	(7.90)	15°	23°	28°	32°	36°	38°	41°	43°	
9.0											3500	3250	3200	3200	3200	3200	3200	3200		9.0
											2950	2750	2700	2700	2700	2700	2700	2700		
											(8.40)	(8.90)	15°	22°	27°	31°	34°	36°		
10.0														3000	2800	2800	2800	2800		10.0
														2550	2400	2350	2350	2350		
														(9.40)	(9.90)	14°	21°	26°	29°	
11.0																2650	2500	2450	2450	11.0
																2200	2100	2050	2050	
																(10.40)	(10.90)	13°	18°	
11.75																		2350	2250	11.75
																		1950	1850	
																		(11.40)	(11.75)	

- RC (kg) < than 10° articulation
- RC (kg) > than 10° articulation
- Boom angle
- () Radius at 0° boom angle
- Loads above red line are structural

Notes to lifting capacity

Lifting capacities do not exceed 66.6% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult Rated Capacity Manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and Rated Capacity Manual both supplied with the crane.




TEREX®

LOAD CHART

Fallblock, Manual



AT 20-3




Pick & Carry 0.4 m/s (1.44 km/h); On rubber 66.6%



9.72–17.90 m

AS 1418.5

Maximum Radius 	Rated Capacity Maximum Extension Maximum Length 17.90 m
m	kg
6.74	2550
	2550
	60°
9.31	2250
	2250
	50°
11.53	2050
	2050
	40°
13.34	1900
	1700
	30°
14.67	1800
	1500
	20°
15.51	1650
	1350
	10°
15.80	1600
	1300
	0°

Notes to lifting capacity

Read and understand warning notes before operating crane.

Weight of slings & hook block to be added to load.

Maximum extension length is 17.90 m.

17.9 m boom length includes manual 3rd extension.

Ratings for manual extension are structural and based on boom angle, not radius.

The ratings do not change if the power sections are retracted with the manual section extended.

Lifting capacities do not exceed 66.6% of tipping load.

Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings.

Consult Rated Capacity Manual for further details.

Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and Rated Capacity Manual both supplied with the crane.

- RC (kg) < than 10° articulation
- RC (kg) > than 10° articulation
- Boom angle
- Loads above red line are structural

TECHNICAL DESCRIPTION



AT 20-3

Boom and Jib



Four section boom:

Main boom, two powered sections, and one manual section (3rd section)



Maximum hook height

17 m



Boom elevation angle range (min. / max.)

-6° / 60°



Maximum hook height with jib

20 m



40° articulation each side of centre providing a total 80° slewing arc

80°

Machinery hook

10 tonne

Winch



Winch:

Fully compensated hook height when telescoping boom 1 and 2



Maximum line pull

4.2 tonne



Two speed winch

41 m/min / 82 m/min



Hook block, four part, maximum rated capacity

16.8 tonne

Engine and Transmission



Mercedes OM 906 EUROMOT 3a turbo charged and intercooled diesel engine with hinged engine cover and mid cover for easy serviceability

205 kW

Engine torque

1110 Nm

Fuel capacity

440 l

Fuel type

diesel



Allison 3000

6-speed automatic

Transfer Case:

Styer VG 750 2:1 ratio

High/low range via airshirt

2WD/4WD via airshift, disconnect to rear axle

TECHNICAL DESCRIPTION



AT 20-3

Hydraulic System

HYDR

Hydraulic Pump:

Load sensing axial piston

Maximum pump flow rate

Maximum working pressure


130 litre/min

250 bar

Hydraulic tank with top mounted return and in tank suction filters

200 l


Chassis



Front Axle:

Kessler D71 PL478 heavy duty high speed planetary axle with driver selectable diff lock


8,000 kg



Rear Axle:


Kessler D71 PL478 heavy duty high speed planetary axle

11,500 kg



Total:

19,500 kg



Full power Orbitrol with twin hydraulic double acting rams with end stop cushioning

Priority flow from main pump supply plus electro hydraulic emergency supply

Turning Circle: Outside wheels radius

7.4 m

Brakes:

Air operated high capacity

Large wedge style twin circuit service and spring applied park brakes on both front and rear axles

Crane operation hold brake on right side front wheel

Driver selectable engine exhaust brake is available in all gears - automatically selects converter lockup

Suspension:

Two semi elliptic springs on front and rear axle plus torsion bar on front axle for stability

Tyres



12.00 x 20 bias ply duals


20 in x 8.5 in heavy duty ISO 10 stud 335 PCD spigot mount rims

TECHNICAL DESCRIPTION



AT 20-3

Vehicle performance

	Maximum rated travel speed	85 kph
	Gradeability	50%

Cab, Controls, and Operator aids

	Two person, insulated lock up cabin: - KAB suspension driver's and passenger seats, including retracting seat belts - Colour LCD display - Radio/CD player with Bluetooth handsfree - Reversing camera - Centralised greasing - Cruise control - Engine monitoring - Service diagnostics
	3B6 rated capacity indicator with audio/visual overload pre-warning and motion cut-outs
	3 axis joystick control for crane functions
	Air conditioned and heated